

DIAGRAM 5 - DRIVEWAY

CONSTRUCTION NOTES

- 1) PLATFORM GRADES SHALL BE $\frac{1}{2}$ " PER FT. OR 4% GRADE.
- 2) COVER OVER CULVERT PIPES SHALL BE 12 INCHES MINIMUM.
- 3) GRADES OF ENTRANCES BEYOND THE PLATFORM SHOULD NOT EXCEED 8%.
- 4) THE ALGEBRAIC DIFFERENCE BETWEEN TWO ADJACENT GRADES SHOULD NOT EXCEED 10%.
- 5) DITCHES ARE RECOMMENDED FOR UNCURBED DRIVEWAYS IN CUT SLOPES.
- 6) ALL DRIVEWAYS SHALL HAVE A SECTION CONTIGUOUS TO HIGHWAY WHICH APPROXIMATES LEVEL GROUND.
- 7) ALL PROPOSED DRIVEWAYS SHALL BE LOCATED A MINIMUM OF 100 FEET FROM EXISTING DRIVES OR STREET INTERSECTIONS.

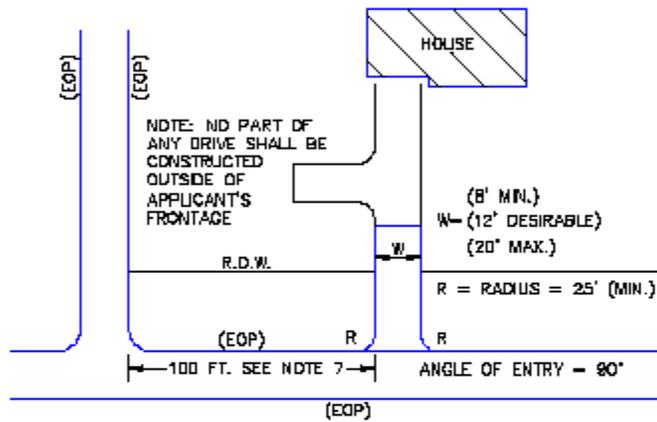


DIAGRAM 5 - DRIVEWAY PLAN

NOT TO SCALE